








Specifications:

Parameter	3 Port TAP Multi-mode				
Operating wavelength	800~900nm				
Ratio	90:10	80:20	70:30	60:40	50:50
Insertion loss@Pass	≤1.0dB	≤1.5dB	≤2.1dB	≤2.8dB	≤3.5dB
Insertion loss@ Tap	≤10.6dB	≤7.5dB	≤5.8dB	≤4.5dB	≤3.5dB
Return Loss	≥30dB				
WDL	≤0.5dB				
Directivity	≥45dB				
Crosstalk	≥50 dB				
Fiber Type	Corning OM3/OM4/OM5				
PDL	≤0.2dB				
Max Optical Power	500 mW				
Operating Temperature	0~+70°C				
Storage Temperature	-45~+85°C				
Connector Type		SC			
		LC			
		FC			
		MTP			

Note: Each side connector adds 0.2dB of insertion loss.

COM 100%

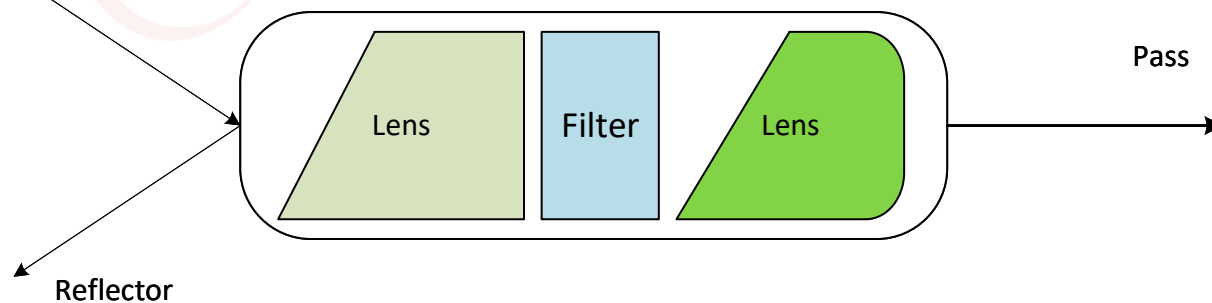

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	3 Port TAP, TFF, Multi-mode, with connectors					OP-3PTAP-xxxnm-SC/LC/FC-M3/4/5			
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.10.10
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.10.10
						APPROVED	STEVEN Zhang	DATE	2025.10.10