

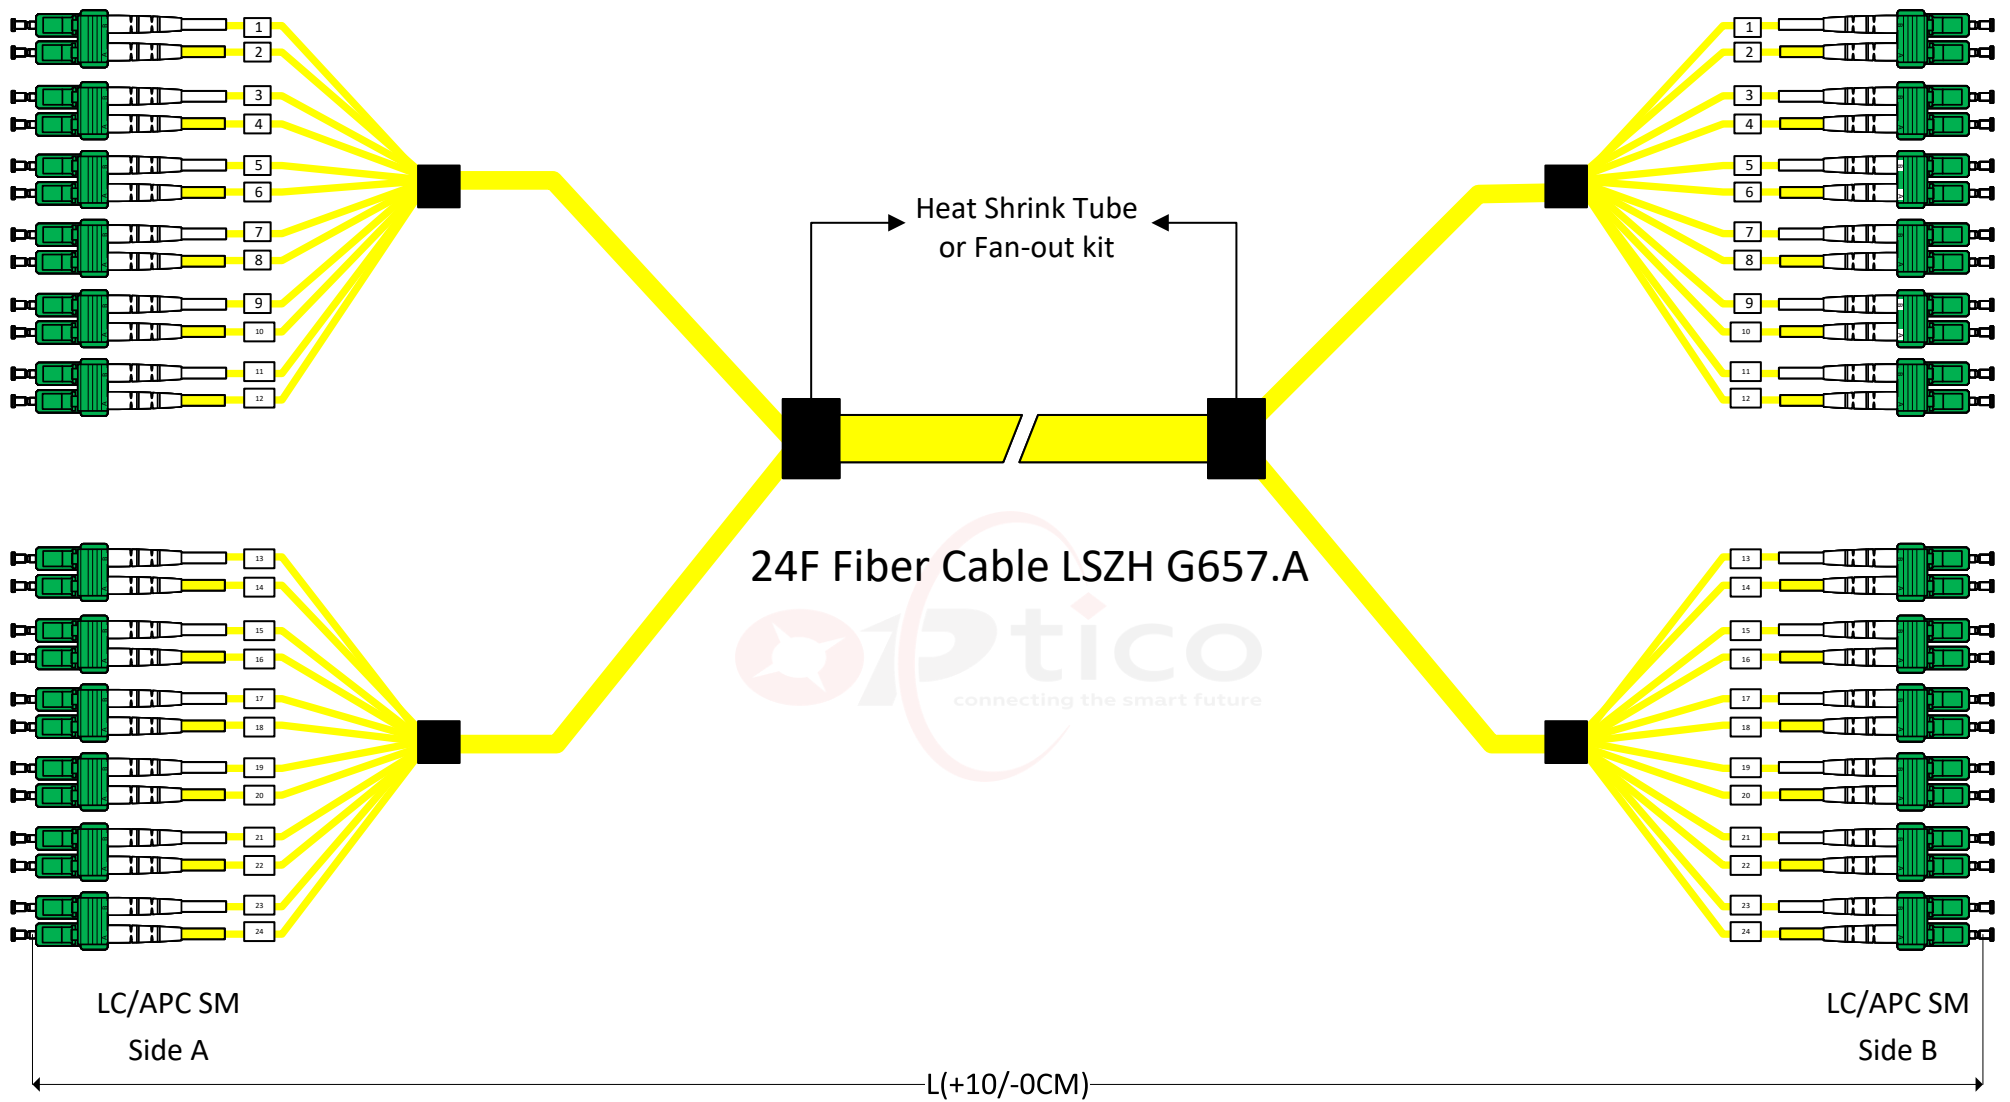


Specification:



- 1.Low Loss IL: $\leq 0.25\text{dB}$
- 2.Return Loss: $\geq 55\text{dB}$
- 3.Operation Environment: $-40\sim+85^{\circ}\text{C}$
- 4.Storage Environment: $-40\sim+85^{\circ}\text{C}$


		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	24F LCUPC-LCUPC SM G657A2 Fan-out Fiber Patchcord 2.0/3.0mm Yellow LSZH CPR-Dca Cable						OP-24F-LCU-FP-2.0/3.0-SM		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.05.07
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.05.07
						APPROVED	STEVEN Zhang	DATE	2025.05.07



Specification:



1. Low Loss IL: $\leq 0.25\text{dB}$
2. Return Loss: $\geq 65\text{dB}$
3. Operation Environment: $-40\sim+85^{\circ}\text{C}$
4. Storage Environment: $-40\sim+85^{\circ}\text{C}$


		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	24F LCAPC-LCAPC SM G657A2 Fan-out Fiber Patchcord 2.0/3.0mm Yellow LSZH CPR-Dca Cable						OP-24F-LCA-FP-2.0/3.0-SM		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.05.07
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.05.07
						APPROVED	STEVEN Zhang	DATE	2025.05.07

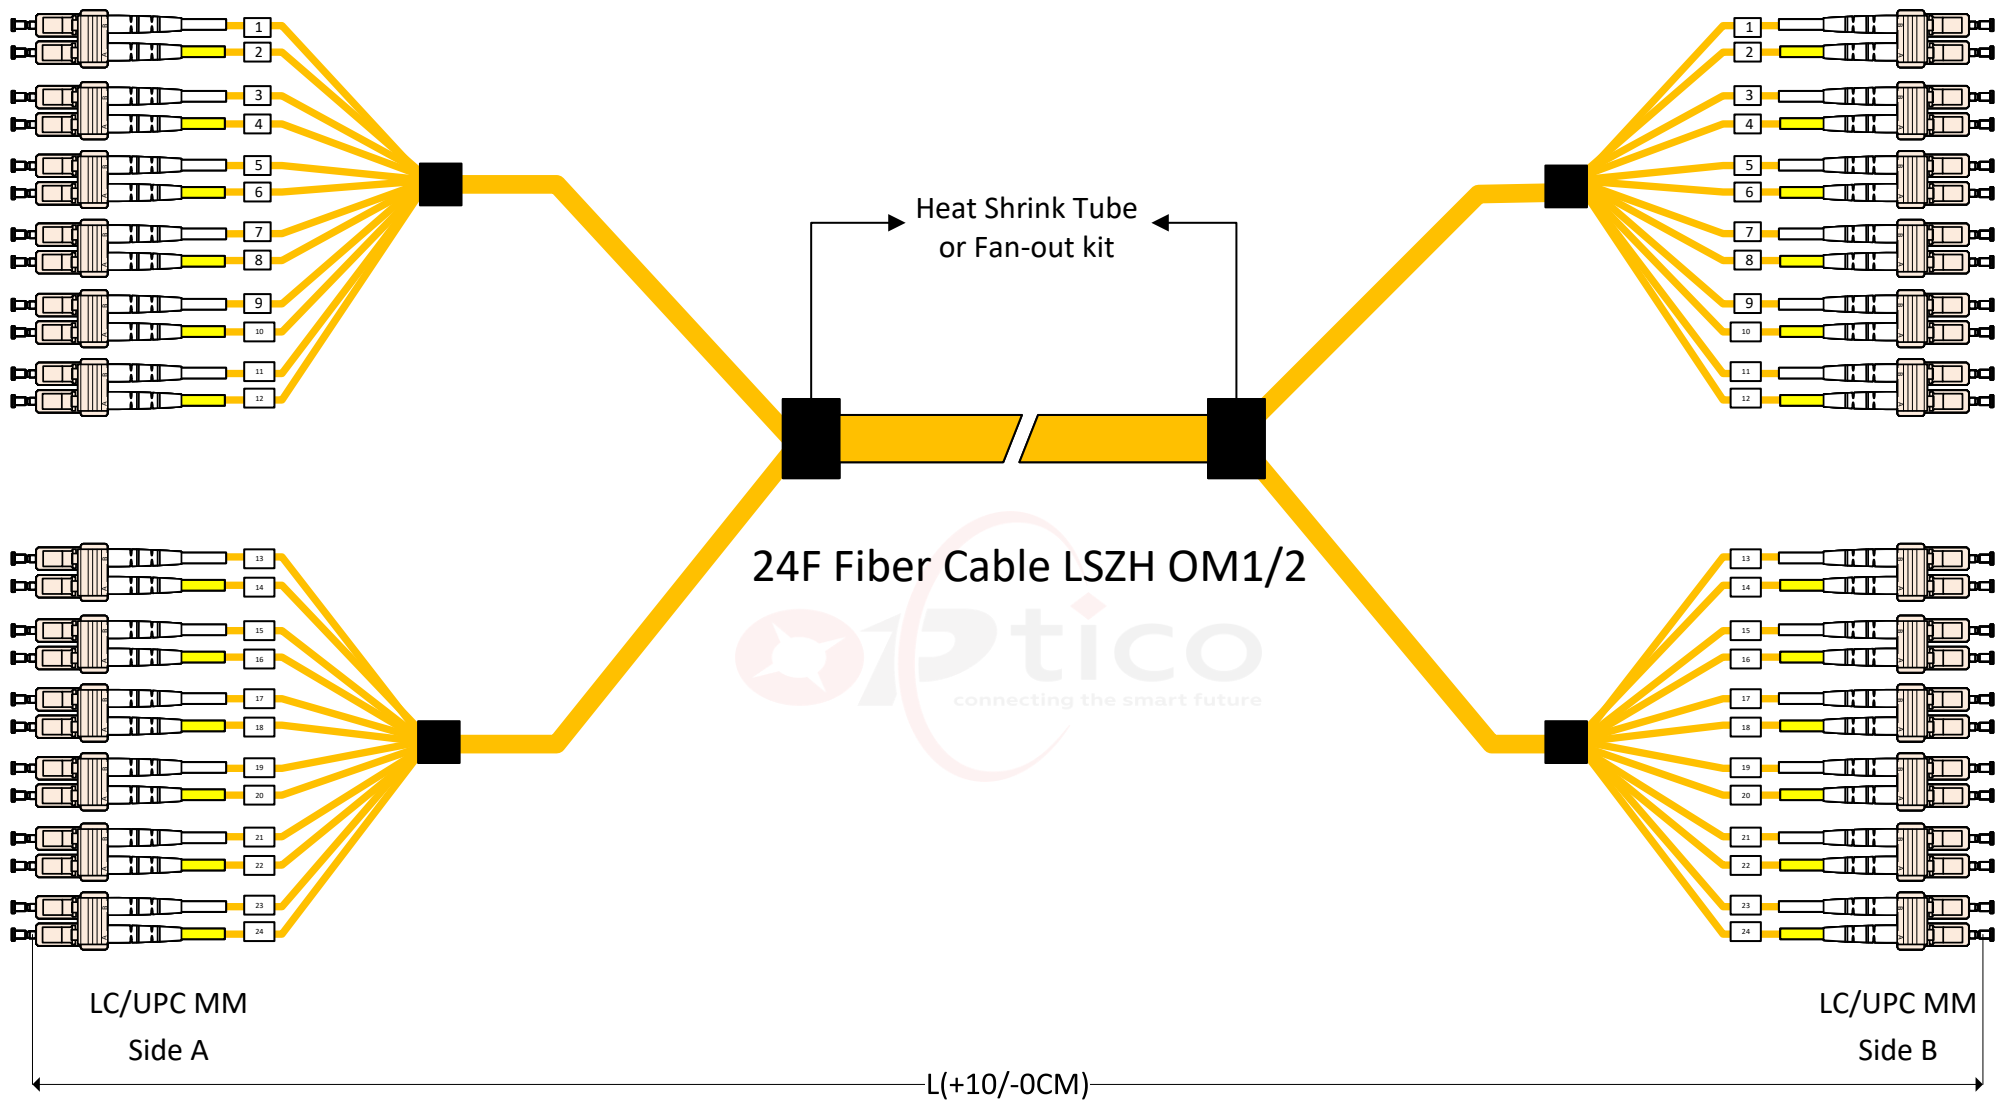

Specification:



- 1.Low Loss IL: $\leq 0.25\text{dB}$
- 2.Return Loss: $\geq 35\text{dB}$
- 3.Operation Environment: $-40\sim+85^{\circ}\text{C}$
- 4.Storage Environment: $-40\sim+85^{\circ}\text{C}$


		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	24F LCUPC-LCUPC OM1/ 2 Fan-out Fiber Patchcord 2.0/3.0mm Orange LSZH CPR-Dca Cable					OP-24F-LCU-FP-2.0/3.0-M1/2			
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.05.07
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.05.07
						APPROVED	STEVEN Zhang	DATE	2025.05.07

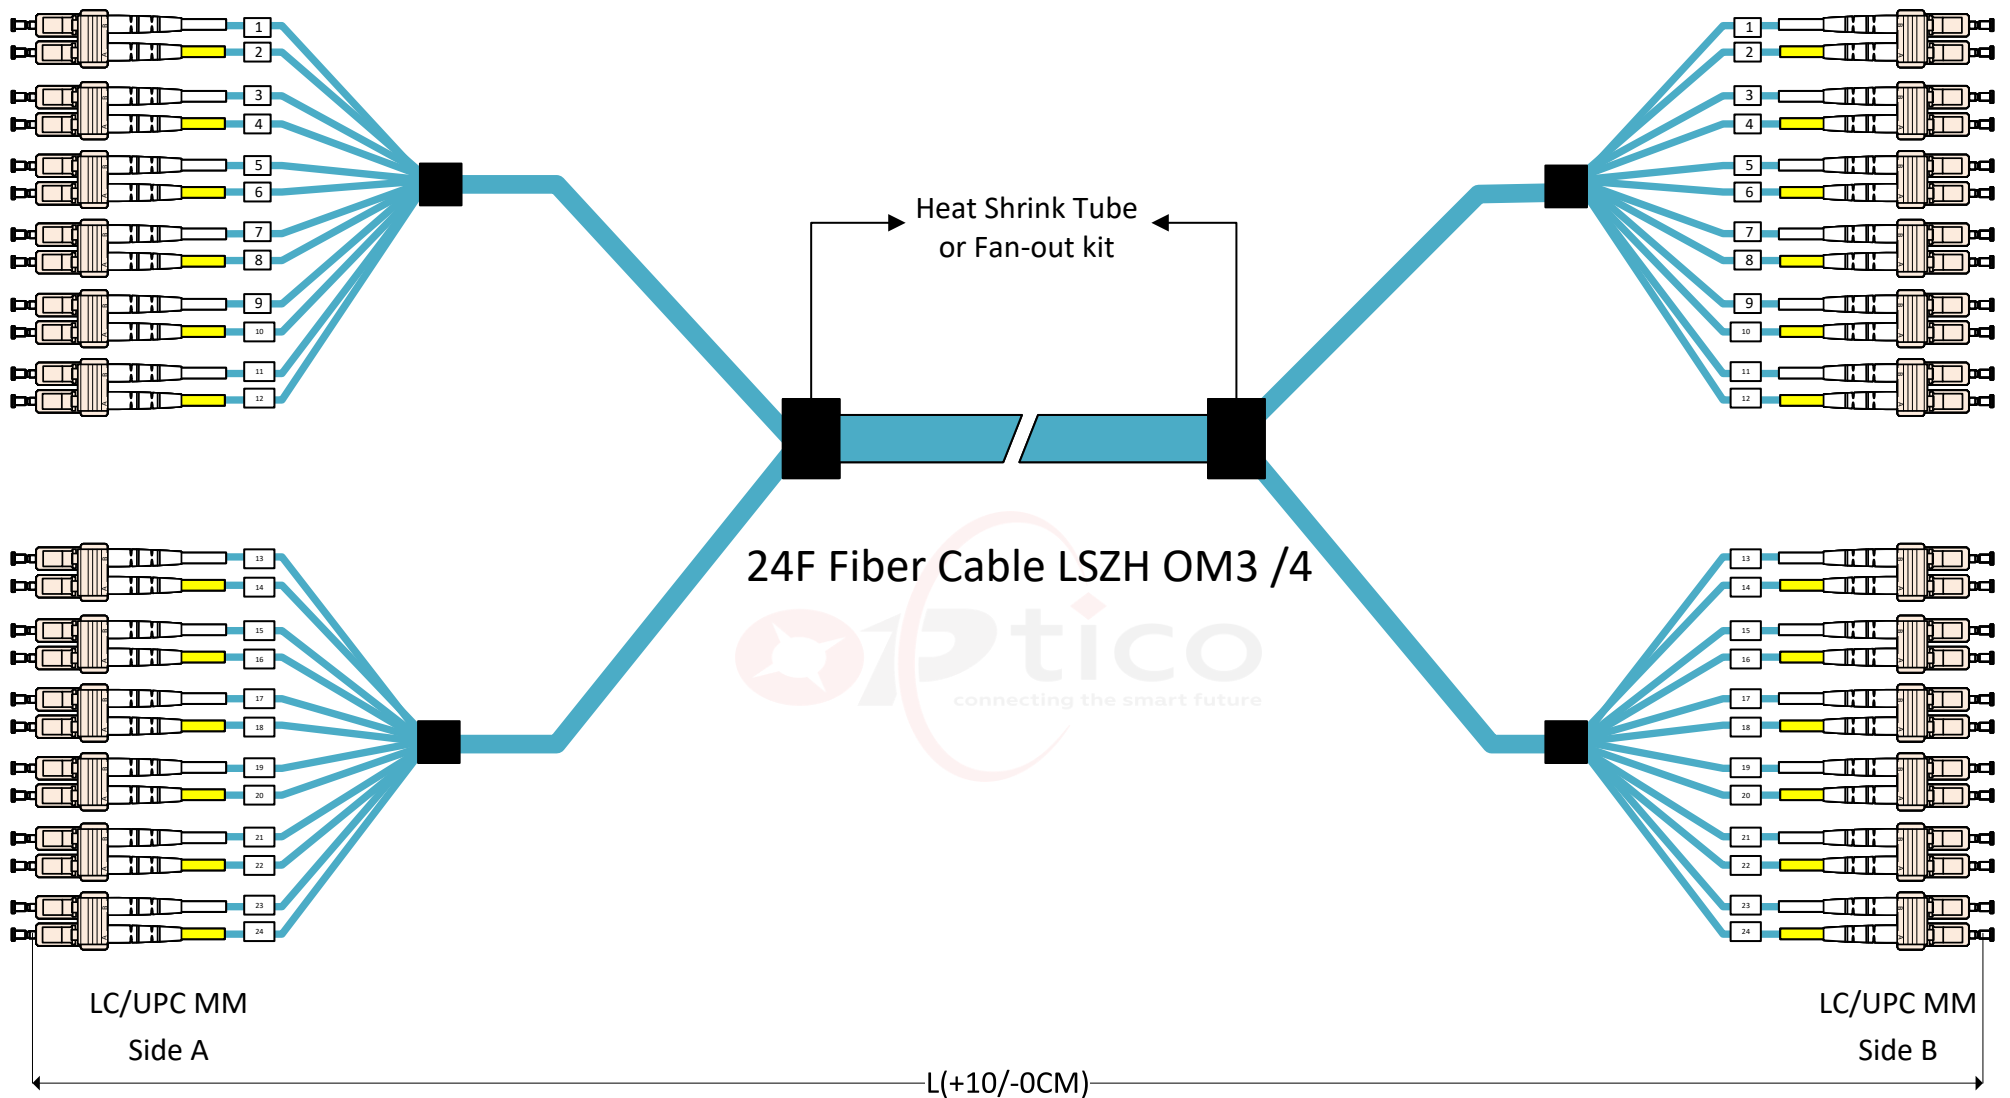

Specification:



1. Low Loss IL: $\leq 0.25\text{dB}$
2. Return Loss: $\geq 35\text{dB}$
3. Operation Environment: $-40\sim+85^{\circ}\text{C}$
4. Storage Environment: $-40\sim+85^{\circ}\text{C}$

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	24F LCUPC-LCUPC OM3 /4 Fan-out Fiber Patchcord 2.0/3.0mm Aqua LSZH CPR-Dca Cable					OP-24F-LCU-FP-2.0/3.0-M3/4			
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.05.07
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.05.07
						APPROVED	STEVEN Zhang	DATE	2025.05.07

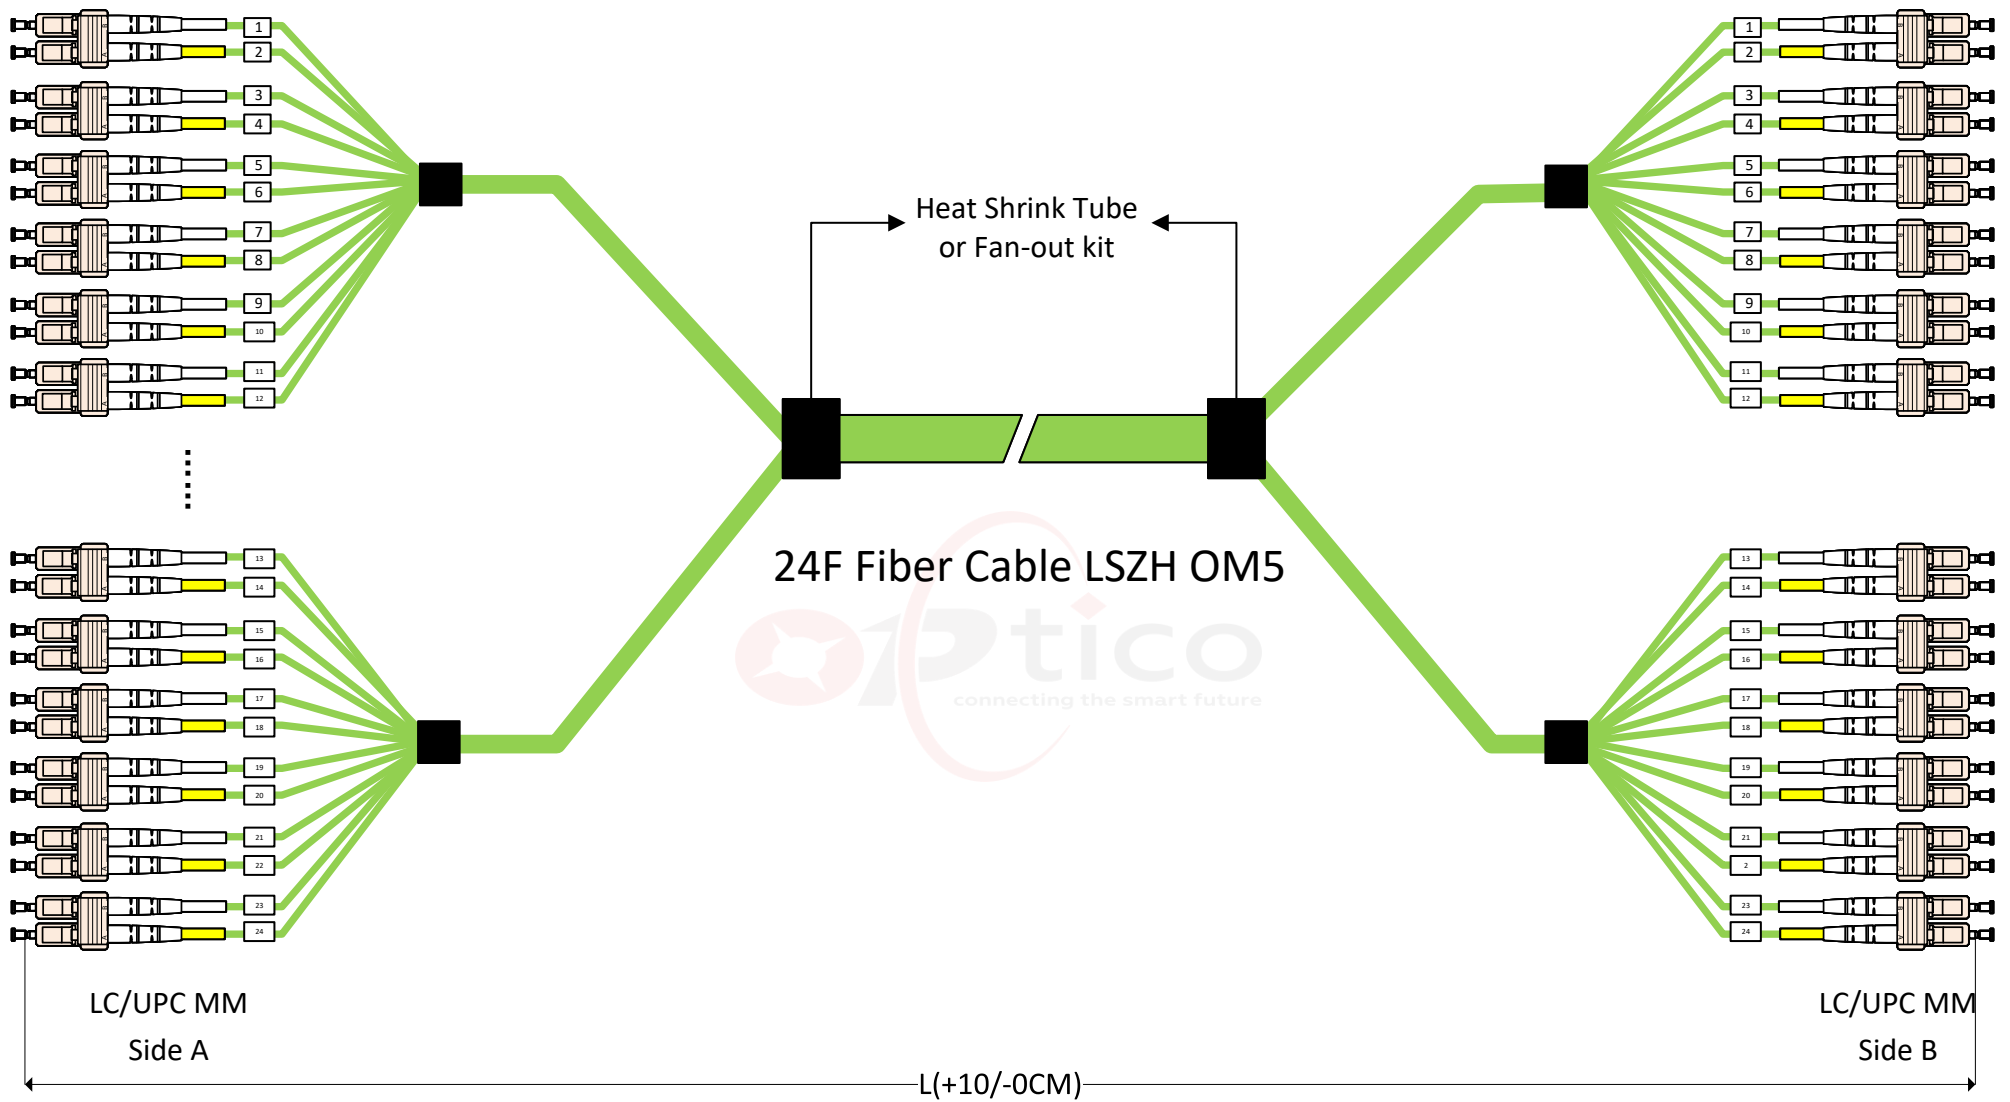

Specification:

1. Low Loss IL: $\leq 0.25\text{dB}$
2. Return Loss: $\geq 65\text{dB}$
3. Operation Environment: $-40\sim+85^{\circ}\text{C}$
4. Storage Environment: $-40\sim+85^{\circ}\text{C}$

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	24F LCUPC-LCUPC OM5 Fan-out Fiber Patchcord 2.0/3.0mm Lime Green LSZH CPR-Dca Cable						OP-24F-LCU-FP-2.0/3.0-M5		
FIRST ANGLE PROJECTION 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.05.07
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.05.07
							APPROVED	STEVEN Zhang	DATE