



Type B (TIA)

Fiber NO.	Color
1	Blue
2	Orange
3	Green
Unterminated	
Unterminated	
Unterminated	
Unterminated	
Unterminated	
Unterminated	
10	Brown
11	Gray
12	White

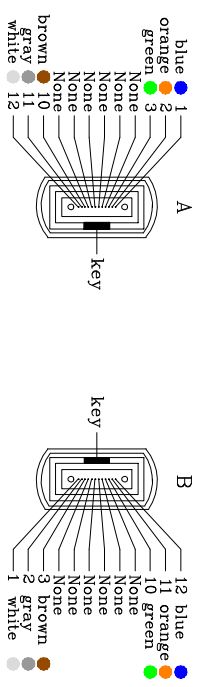

Cable Structure

- Specification :
- 1.Insertion Loss: ≤0.6dB
  - 2.Return Loss: ≥60dB
  - 3.Operating environment: -40~+85°C
  - 5.Storage environment: -40~+85°C

**Optico** SHENZHEN FLX OPTICO COMMUNICATION CO.,LTD

Model	6C ODVA MPO Male-ODVA MPO Female SM G657A2							
FIRST ANGLE PROJECTION:	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	CHECKED	APPROVED
	5.0mm Black Armored Cable	m		A4	1	Michael Liu	Steven Zhang	Steven Zhang
						DATE	DATE	DATE