

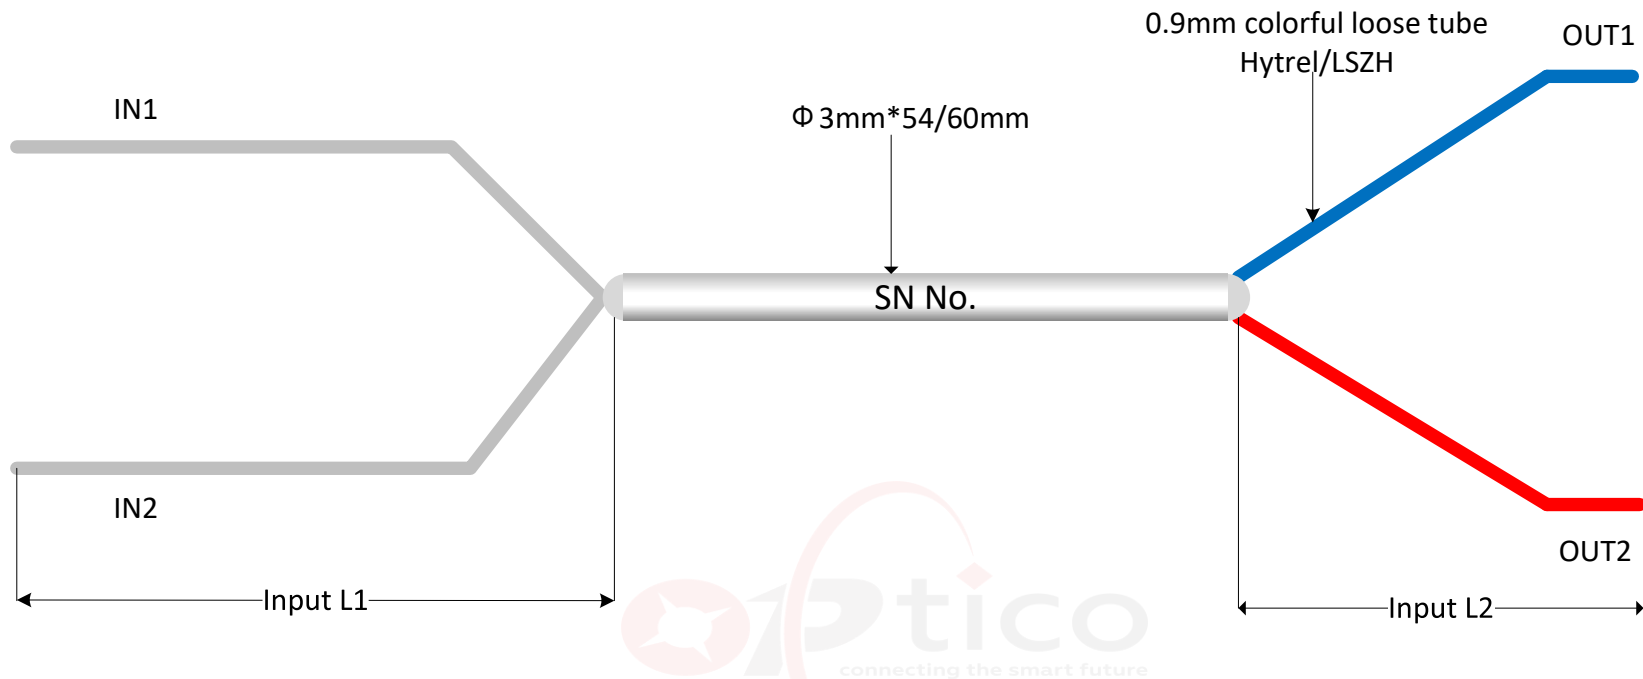





Parameter		1x2					
Ratio		50:50	60:40	70:30	80:20	90:10	99:1
Operating Wavelength		1060±40/1310±40/1550±40					
Insertion loss	Max	3.7/3.7	2.9/4.8	2.2/6.0	1.5/7.9	1.0/11.3	0.5/21.8
PDL	Max	0.2	0.2	0.2	0.2	0.2	0.2
Return loss	Min	50	50	50	50	50	50
Directivity	Min	55	55	55	55	55	55
Work Temperature	-40~+85°C						
Storage Temperature							
Fiber Type	G657A./As request						
Dimension	Φ 3mm*54/60mm						
Connector	SC/LC/FC/ST/As request						

		<b>SHENZHEN OPTICO COMMUNICATION CO., LTD.</b>							
Model	1x2 SM FBT XX:XX(1310/1550±40) 0.9mm with connectors						OP-1X2-FBT-XXXX-XM-XC		
<b>FIRST ANGLE PROJECTION</b> 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.03
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.03
						APPROVED	STEVEN Zhang	DATE	2025.06.03






Parameter		2x2					
Ratio		50:50	60:40	70:30	80:20	90:10	99:1
Operating Wavelength		1060±40/1310±40/1550±40					
Insertion loss	Max	3.7/3.7	2.9/4.8	2.2/6.0	1.5/7.9	1.0/11.3	0.5/21.8
PDL	Max	0.2	0.2	0.2	0.2	0.2	0.2
Return loss	Min	50	50	50	50	50	50
Directivity	Min	55	55	55	55	55	55
Work Temperature	-40~+85°C						
Storage Temperature							
Fiber Type	G657A./As request						
Dimension	Φ 3mm*54/60mm						
Connector	SC/LC/FC/ST/As request						

		SHENZHEN OPTICO COMMUNICATION CO., LTD.							
Model	2x2 SM FBT XX:XX(1310/1550±40) 0.9mm with connectors						OP-2X2-FBT-XXXX-XM-XC		
FIRST ANGLE PROJECTION  	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.03
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.03
						APPROVED	STEVEN Zhang	DATE	2025.06.03

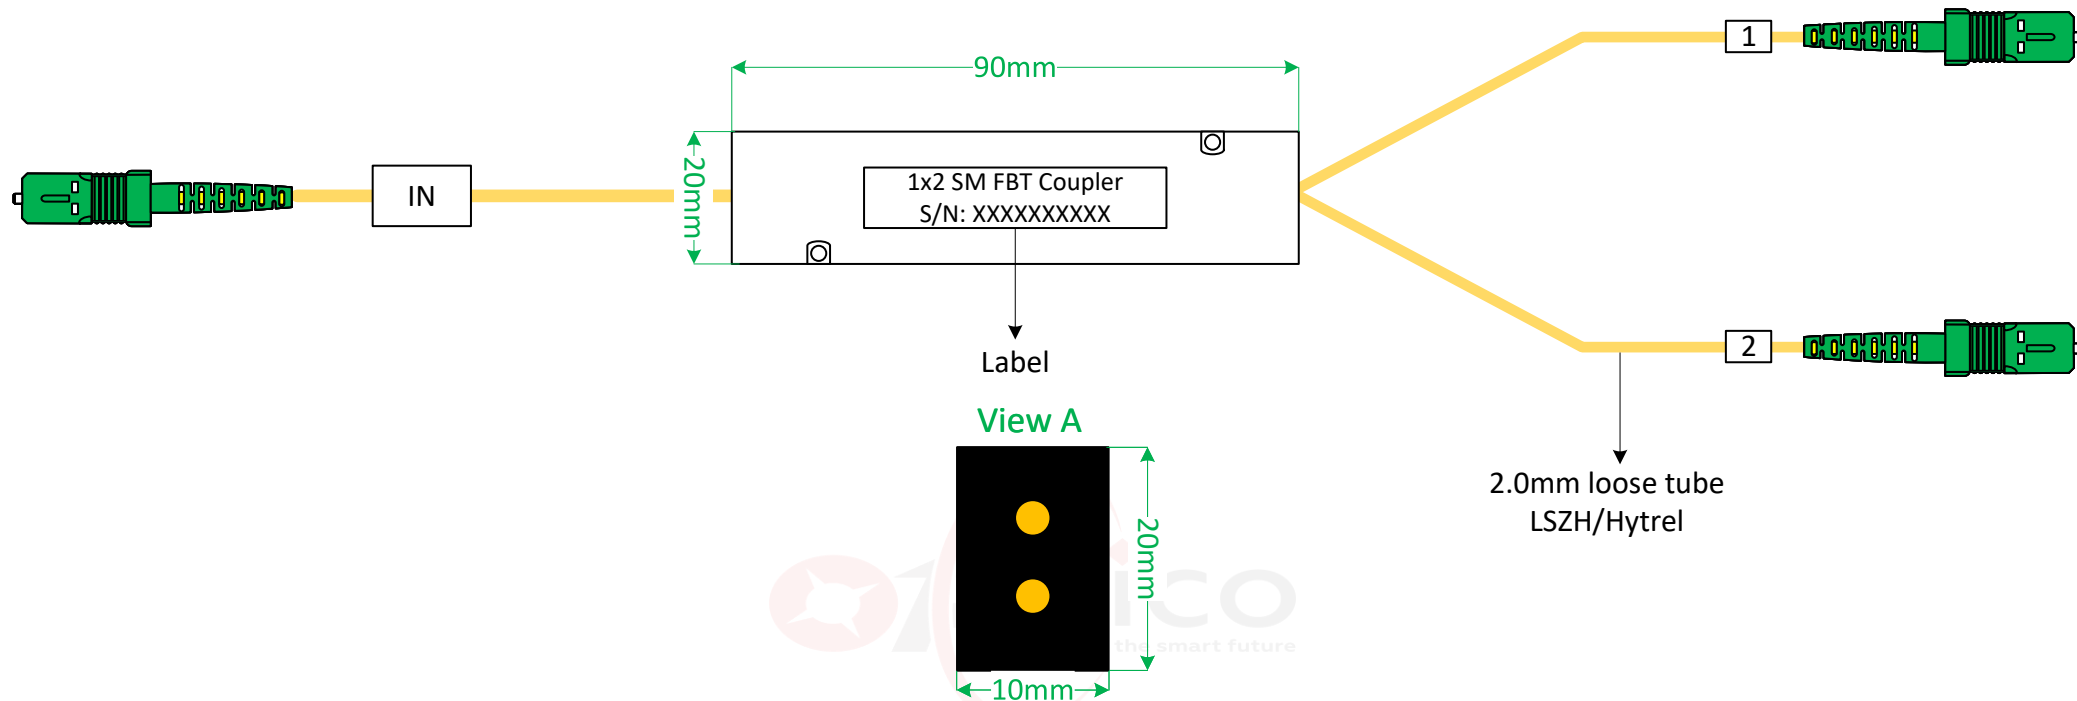



Parameter		1x2 FBT Coupler					
Ratio		50:50	60:40	70:30	80:20	90:10	99:1
Operating Wavelength		1064±40/1310±40/1550±40					
Insertion loss	Max	3.7/3.7	2.9/4.8	2.2/6.0	1.5/7.9	1.0/11.3	0.5/21.8
PDL	Max	0.2	0.2	0.2	0.2	0.2	0.2
Return loss	Min	50	50	50	50	50	50
Directivity	Min	55	55	55	55	55	55
Work Temperature		-40~+85°C					
Storage Temperature							
Fiber Type		G657A./As request					
Dimension		90*20*10mm					
Connector		SC/LC/FC/ST/As request					

 <b>SHENZHEN OPTICO COMMUNICATION CO., LTD.</b>																							
Model	1x2 SM FBT XX:XX(1310/1550±40) 2.0mm with connectors OP-1X2-FBT-ABS-XXXX-XM-XC																						
FIRST ANGLE PROJECTION 	<table border="1"> <tr> <td>MATERIAL</td> <td>UNIT</td> <td>SCALE</td> <td>SIZE</td> <td>SHEET</td> <td>DRAWN</td> <td>XUELING W</td> <td>DATE</td> <td>2025.06.03</td> </tr> <tr> <td rowspan="2">LSZH</td> <td rowspan="2">m</td> <td rowspan="2">/</td> <td rowspan="2">A4</td> <td rowspan="2">1</td> <td>CHECKED</td> <td>Michael Liu</td> <td>DATE</td> <td>2025.06.03</td> </tr> <tr> <td>APPROVED</td> <td>STEVEN Zhang</td> <td>DATE</td> <td>2025.06.03</td> </tr> </table>	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.03	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.03	APPROVED	STEVEN Zhang	DATE	2025.06.03
	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.03														
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.03														
APPROVED						STEVEN Zhang	DATE	2025.06.03															

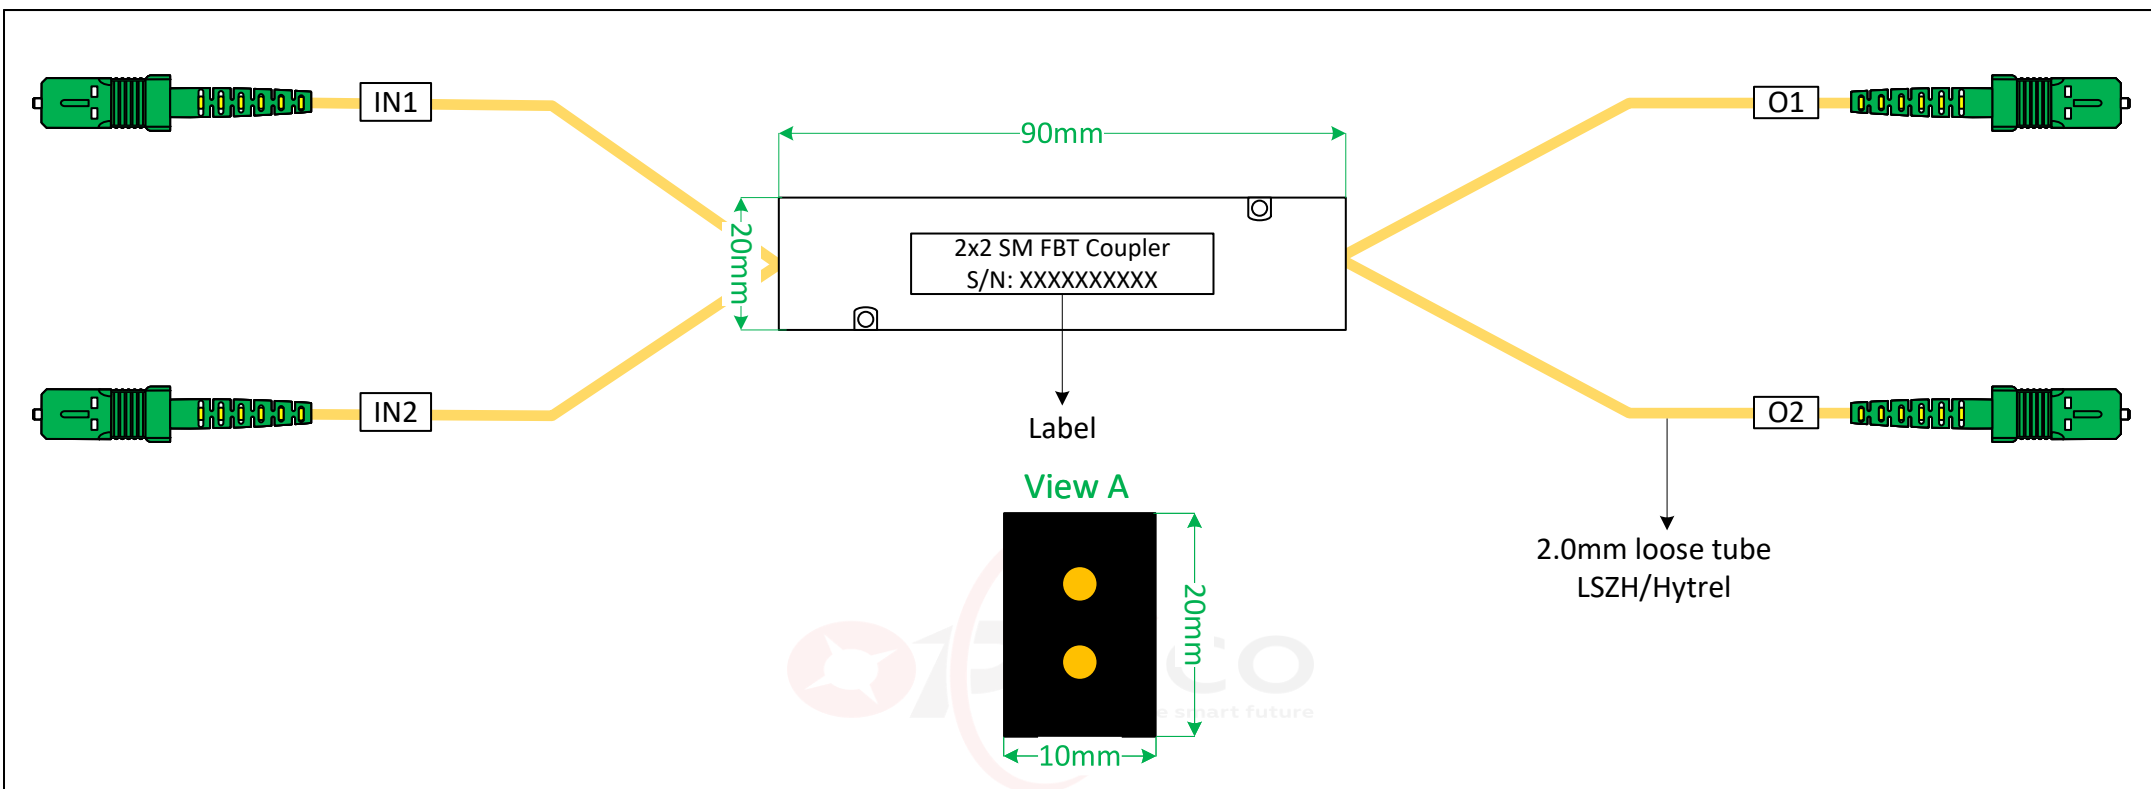

Parameter		2x2 FBT Coupler					
Ratio		50:50	60:40	70:30	80:20	90:10	99:1
Operating Wavelength		1064±40/1310±40/1550±40					
Insertion loss	Max	3.7/3.7	2.9/4.8	2.2/6.0	1.5/7.9	1.0/11.3	0.5/21.8
PDL	Max	0.2	0.2	0.2	0.2	0.2	0.2
Return loss	Min	50	50	50	50	50	50
Directivity	Min	55	55	55	55	55	55
Work Temperature		-40~+85°C					
Storage Temperature							
Fiber Type		G657A./As request					
Dimension		90*20*10mm					
Connector		SC/LC/FC/ST/As request					

 <b>SHENZHEN OPTICO COMMUNICATION CO., LTD.</b>									
Model	2x2 SM FBT XX:XX(1310/1550±40) 2.0mm with connectors	OP-1X2-FBT-ABS-XXXX-XM-XC							
<b>FIRST ANGLE PROJECTION</b> 	MATERIAL	UNIT	SCALE	SIZE	SHEET	DRAWN	XUELING W	DATE	2025.06.03
	LSZH	m	/	A4	1	CHECKED	Michael Liu	DATE	2025.06.03
							APPROVED	STEVEN Zhang	DATE